



Linear Environmental-friendly Optoisolator


LLI 220




10

SENBA SENSING TEC

森霸传感科技股份有限公司
SENBA SENSING TECHNOLOGY CO., LTD.

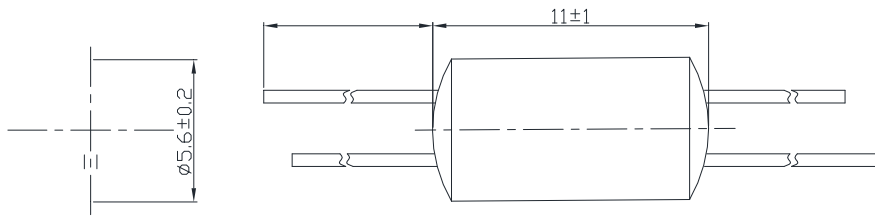


	LLI
	25 48% - 52%
() Vf	1.8—2.2 Vdc
() If	0-10mA
Ir	Vr =5Vdc max10μA
VR	5Vdc
	5pF
	5Vdc max30Vdc
	0.1mA
	10mA 90 - 140μA
	2.5ms
	300KHz
PD	100mW
Topr	-25—+70
Tstg	-30—+80
ESD	2000V

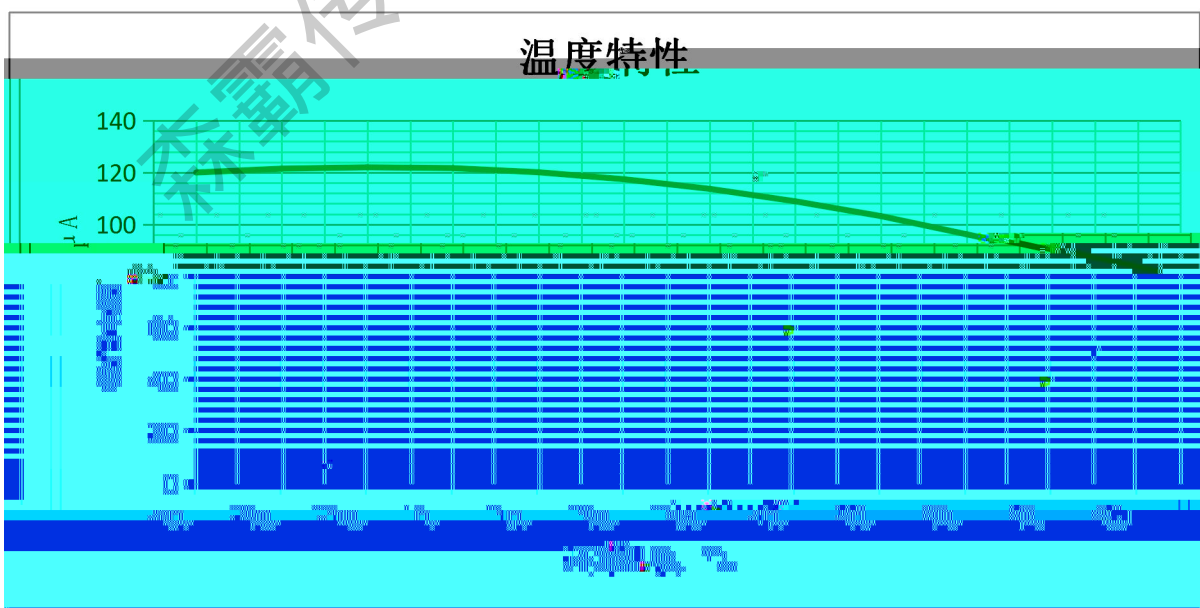

25


10mA


输入输出特性

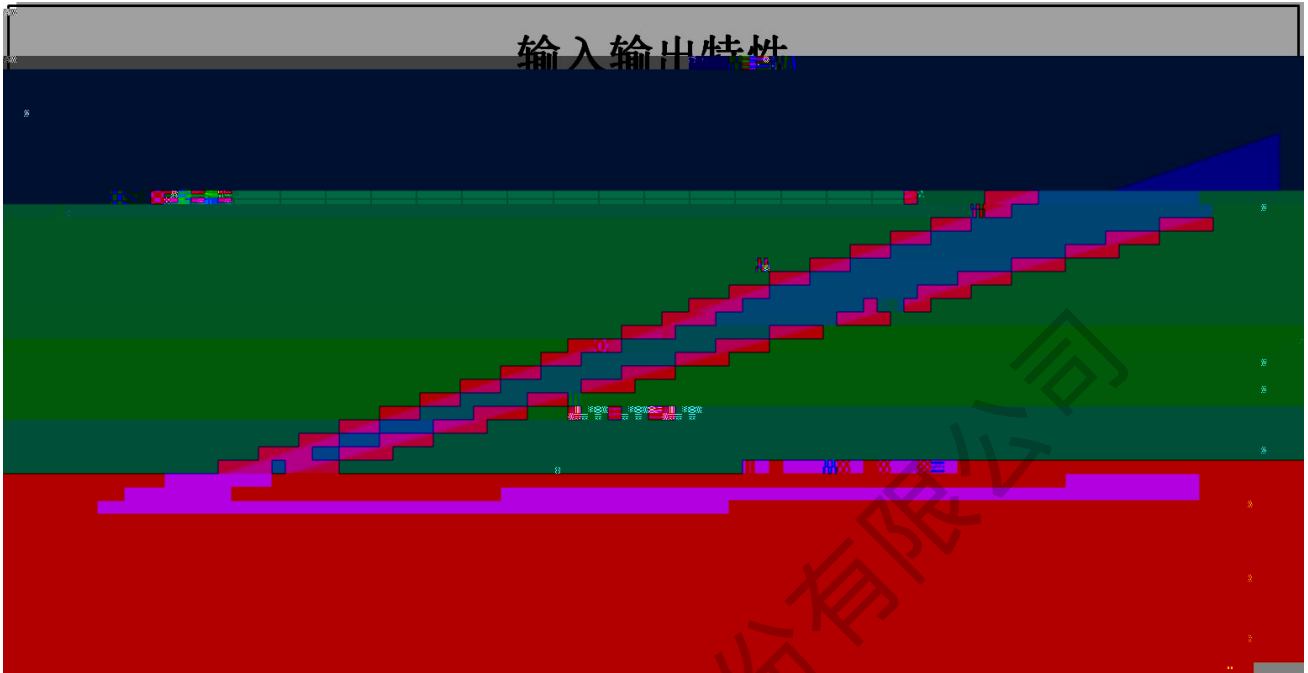

25

48% - 52%

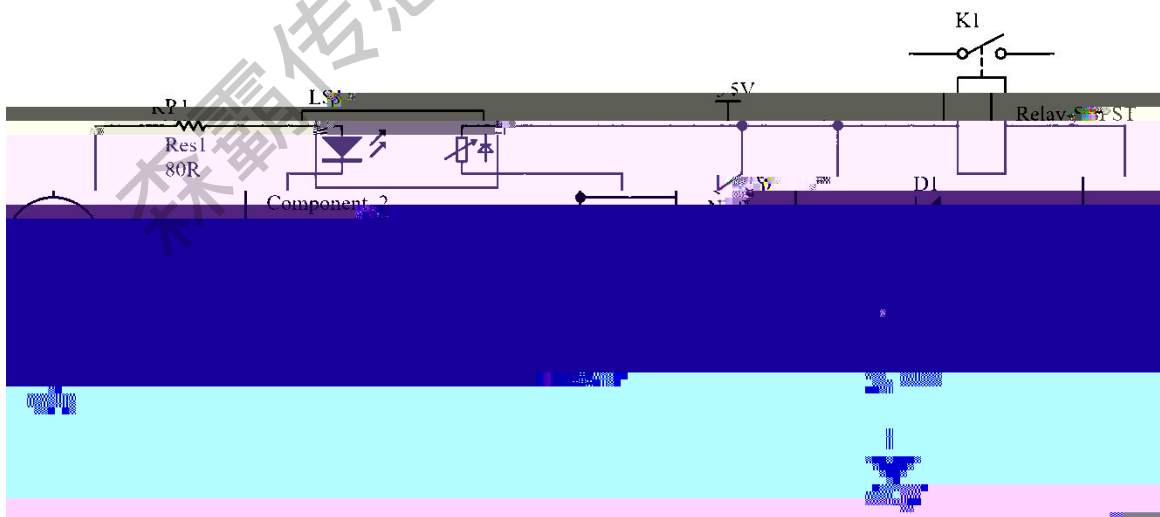


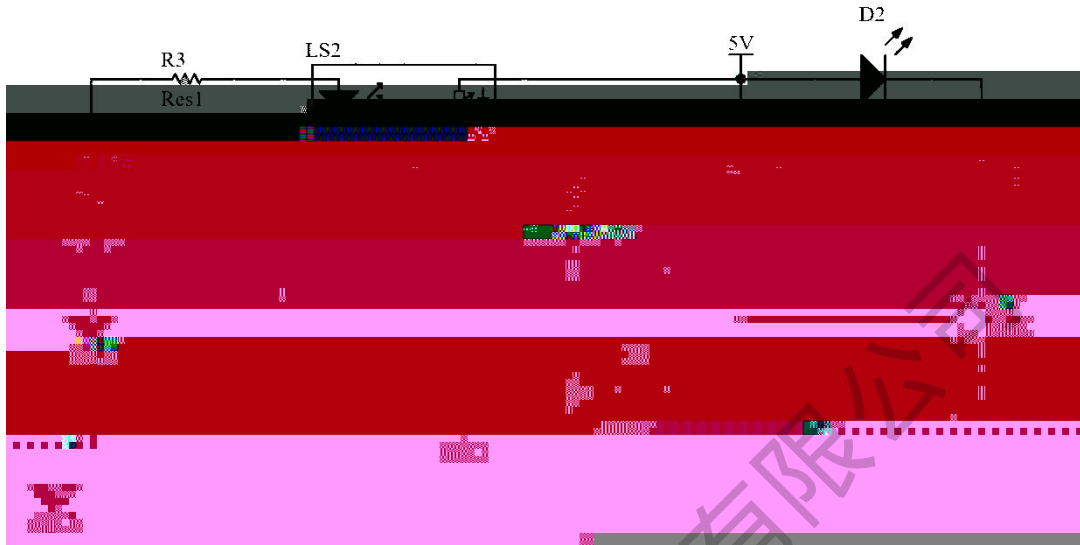

LED

100k

LED

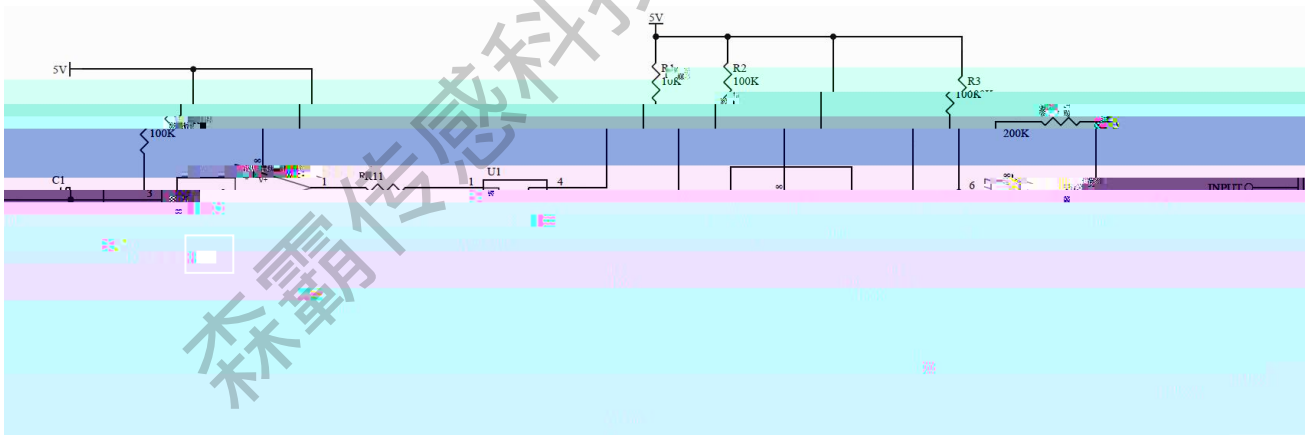

Cds

R11

LED

R12



SENBA SENSING TEC

森霸传感科技股份有限公司

SENBA SENSING TECHNOLOGY CO., LTD.