



## To-Type SMD Digital Pyroelectric Infrared Sensors

---

S23- S340B

V1.2

1.

ISO 14001

ISO 14001

ISO 9001

1.2

RoHS

RoHS

RoHS

1.3

1.3.1


fr  
E4y  
PROPERTY W E








### 3.7

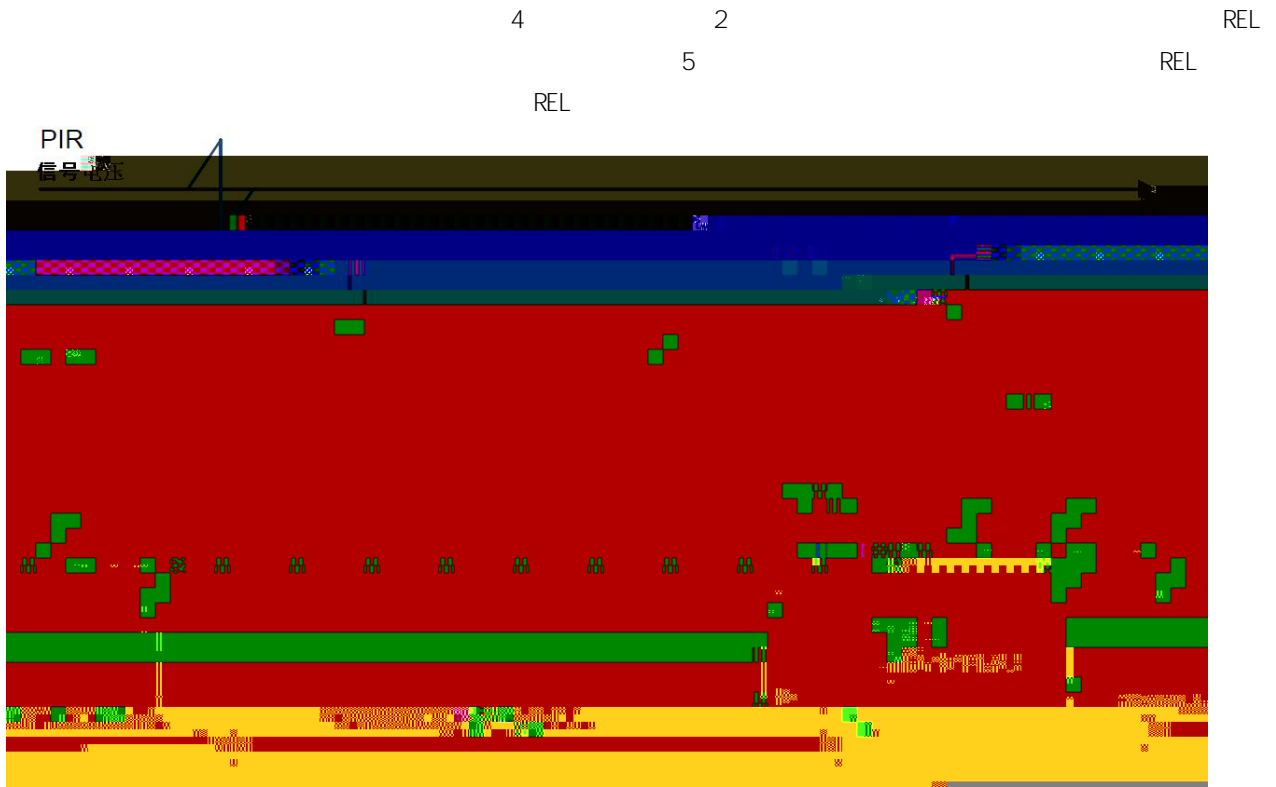

### 3.8 REL ONTI ME

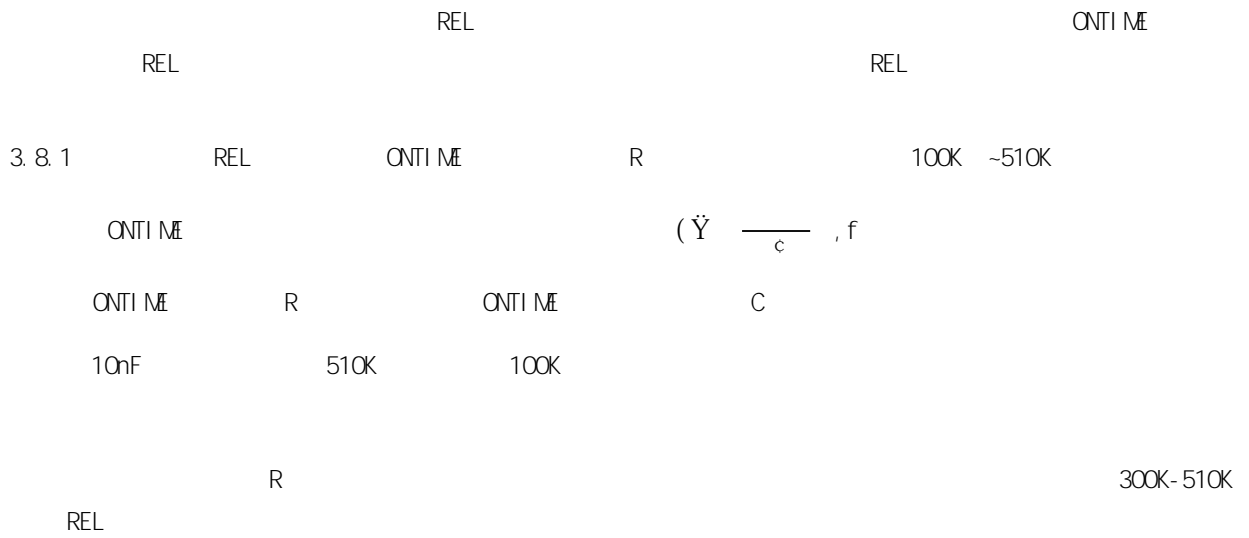



3.8.2

REL

CONTINUE

VDD/2

5.

1	GB/T 10125- 2012				OK	
2	70	500			OK	
3	-40	500			OK	
4	-30 ± 3 @30	25 ± 3 @	70 ± 3 @30		OK	
5	25 ± 3	10			OK	
6	85	85%RH	100	2	OK	
7	2	10- 55Hz	1. 5mm	3	1h	OK

7.1.6

SO<sub>2</sub>

Cl<sub>2</sub>, NO<sub>x</sub>

7.1.7

72h

40± 10%RH

7.1.8

3

## 7.2

7.2.1

7.2.1.1

7.2.1.2

7.2.1.3

7.2.1.4

1

SO<sub>2</sub> Cl<sub>2</sub>, NO<sub>x</sub>

2

3

4

5

6

7

8

7.2.2

1

2

3

4

5 \*

6

7

8

### 7.3

7.3.1 7

7.3.2 PIR PIR 3

7.3.3

7.3.4

80s 100s 20s 30s 60s 12